

Cable Guard for SIP-3600 Model CBL-GRD-1

OVERVIEW

The Model CBL-GRD-1 cable guard is a field installable accessory for Enginuity's SIP-3600 Service Interface Panel. The cable guard provides physical protection for cable connections that are made near the ends of the panel.

APPLICATION

In outside plant cabinets, cable entry can be located near one or both ends of a SIP-3600 panel. The cable guard helps protect existing panel connections – particularly fiber cables and connectors – from potential damage as other cables are pulled through the cabinet. A slot in the center of the cable guard accommodates cables that may already be routed from the side and across the center of the SIP-3600 faceplate.

INSTALLATION

The cable guard can be mounted to each or either end of an Enginuity Model SIP-3600 panel.

Attach the cable guard by inserting the included Phillips $8-32 \times 3/8$ " screw through the metal tab and fastening it to the threaded hole in the SIP-3600 faceplate, as shown in Figure 1.

CUSTOMER SERVICE

If technical or customer assistance is required, please contact Enginuity at the following address or phone number:

Enginuity Communications 3545 Stern Avenue St. Charles, IL 60174 Toll Free: 1-800-980-3266 Voice: (630) 444-0778 www.enginuitycom.com

WARRANTY

Enginuity warrants this product for one (1) year from date of purchase. The warranty does not cover any losses or damages resulting from shipment, improper installation, abuse, modification, or repair by other than Enginuity personnel.

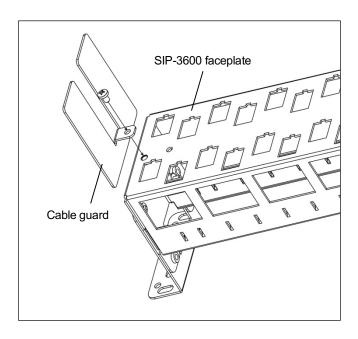


Figure 1. Cable guard attachment to SIP-3600.

REPAIR AND RETURN

Enginuity equipment will be repaired or replaced without cost during the warranty period if the product is defective for any reason other than abuse, improper use, or improper installation. Before returning defective equipment, first request a Return Material Authorization (RMA) number from Enginuity. Once an RMA number is obtained, return the unit, freight prepaid, along with a brief description of the problem, to:

Enginuity Communications 3545 Stern Avenue St. Charles, IL 60174 ATTN: Repair & Return Dept.

Replacements will be shipped in the fastest manner consistent with the urgency of the situation.

SPECIFICATIONS

Height: 3.3 inches

Installed depth (from SIP-3600 faceplate): 2.7 inches