

# LOC-DROP® LOCatable DROP Fiber Repair Housing

*Fast, economical repair for damaged fiber drop cables*



## APPLICATIONS

Today's subscribers are more sensitive to service outages than ever before. Service Providers strive to locate and resolve service outages quickly and cost effectively. The LOC-DROP fiber repair enclosure offers an economical alternative to replacing a subscriber's severed fiber drop cable. LOC-DROP is a robust, permanent repair solution used in aerial or buried deployments.

Two different versions are available to meet your repair application.

The LOC-DROP Repair Housing is a single enclosure for repairing fiber drop when there is at least 5 feet of slack fiber available.


The LOC-DROP Fast Repair Kit Includes two repair enclosures interconnected with factory terminated SC/APC micro-armored cable that provides the required fiber slack if no slack is available on the damaged fiber drop.

## FEATURES


- Robust, weatherproof thermoplastic housing
- Housing includes an SC/APC adapter and supports up to 2 single fusion splicing
- Fast repair kit for where fiber slack is not available – identifiable with programmed OTDR
- Direct bury, strand, wall or pole mounting
- Tone wire connection point for underground locating



*LOC-DROP Repair Housing*

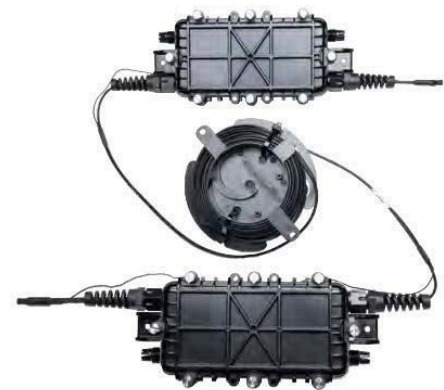


*LOC-DROP Fast Repair Kit*

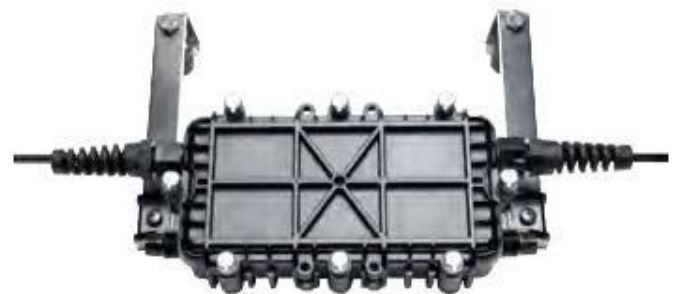


*Shown with Strand Mount Brackets*


# LOC-DROP® LOCatable DROP Fiber Repair Housing

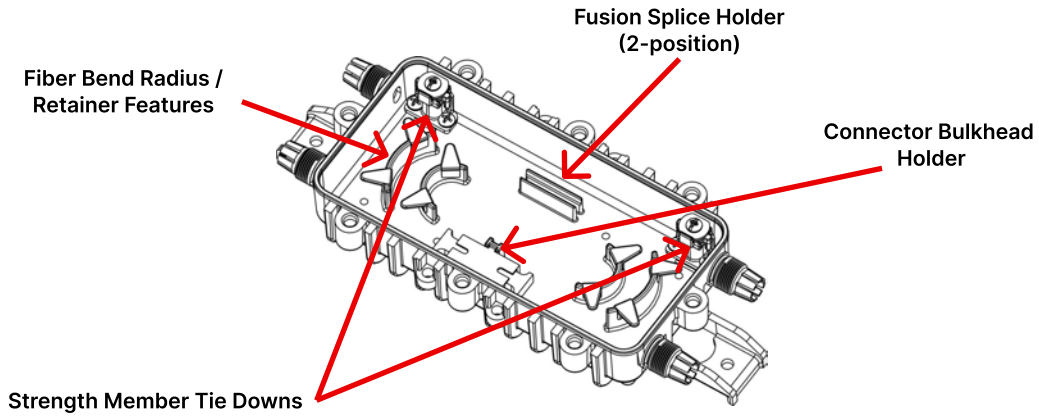

LOC-DROP Housing—Interior

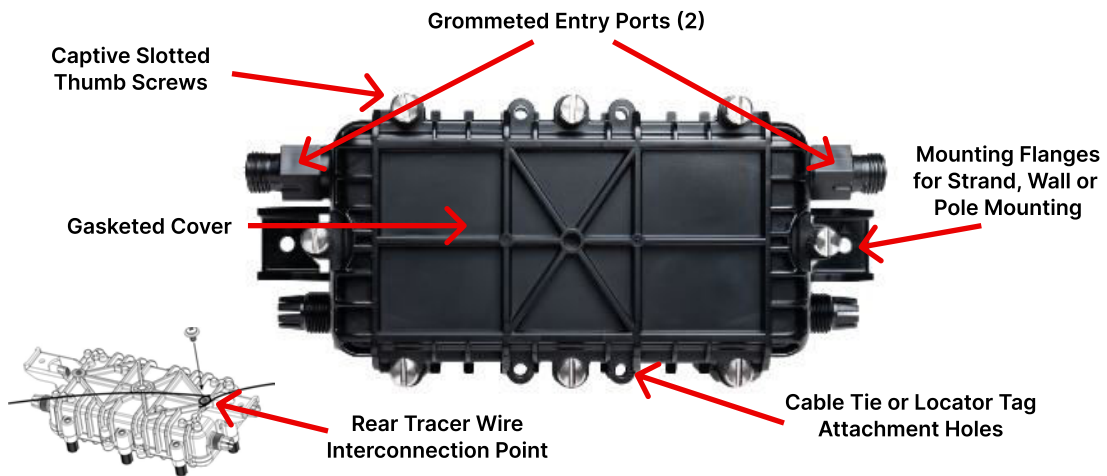

LOC-DROP Housing—Exterior

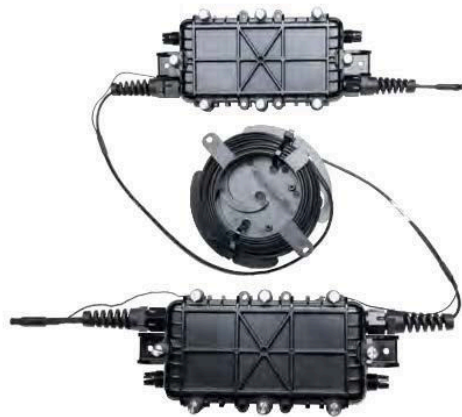

LOC-DROP Fast Repair Kit

# LOC-DROP® LOCatable DROP Fiber Repair Housing



## SPECIFICATION

|            | UoM | LOC-DROP Housing  | LOC-DROP Fast Repair Kit   |
|------------|-----|---|--|
| Capacity   |     | <ul style="list-style-type: none"> <li>Includes 1 SC/APC adapter</li> </ul> | <ul style="list-style-type: none"> <li>Includes 1 SC/APC adapter in each housing</li> <li>Up to 2 single fusion splices per housing</li> </ul> |
| Dimensions | in  | 8.75 L x 3.75 W x 2.25 H  | 8.75 L x 3.75 W x 2.25 H (x2)  |
| Weight     | lbs | 0.6   | 2.1  |

## ORDERING INFORMATION

| Enginuity Part # | Description  |
|------------------|--|
| LOCDROP-EN       | LOC-DROP Repair Housing includes one SC/APC adapter and 2 sets of entry port grommets for flat or FastAccess®-type drop cables.  |
| LOCDROP-2SCAPC   | LOC-DROP Fast Repair Kit, includes two LOC-DROP repair housings interconnected with 51.5' micro-armored cable assembly with tracer wire, 2 sets of entry port nuts and grommets for flat drop or Fast-Access type drop cables. |
| LOCDROP-SM-10    | Strand mount brackets, 10 pairs, with strain relief boots and hardware, for 10 LOC-DROP housings   |
| LD-RNGK2-20      | Replacement nut/grommet kits, each kit contains 2 sets of oval grommets/ large hole nuts, 2 sets round hole grommets/small hole nuts, 20 kits  |

Contact your Enginuity representative for other configurations.

Fast-Access is a registered trademark of CORNING OPTICAL COMMUNICATIONS LLC.