

NID - SFU Spool

Provides fiber demarcation point for fiber drop in a single family unit



Enginuity's Single Family Spool Network Interface Device (NID) accepts our Spooled Indoor/Outdoor fiber to the premise. Accommodates feeder drop cable that is pre-terminated with SC/APC or spliced in the NID. Designed with a compact and rugged construction to ensure a durable and reliable performance in an indoor and outdoor environment.

FEATURES

- Dedicated fiber management area for feeder fiber that is either pre-terminated with SC/APC connector or blunt for splicing in the NID
- Includes (1) SC/APC adapter for connectorized drop
- Configured to accept Enginuity's Spooled Indoor/Outdoor fiber cable that routes to the premise (sold separately)
- Choice of unique 4-port rubber grommet that provides superior sealing for cables and provides strain relief or rubber grommet that accommodates 3/4" and 1" conduit
- 3/8" Hex Head Bolt access with 216 tool with provision for padlock
- Tone/tracer wire post for external access on bottom side





NDSL-XABA-BABA (shown)

SPECIFICATION


Material	Impact Resistant Plastic, Outdoor rated, Telco Gray color
Performance	Designed to meet GR-2898-CORE
Application	Indoor or outdoor enclosure for wall mounting

NIDS & ENCLOSURES



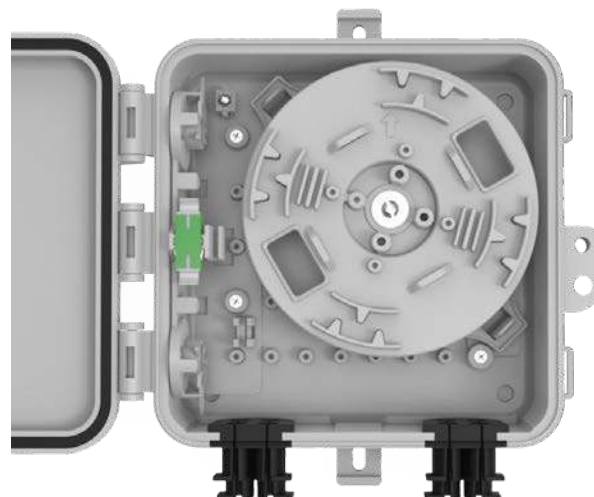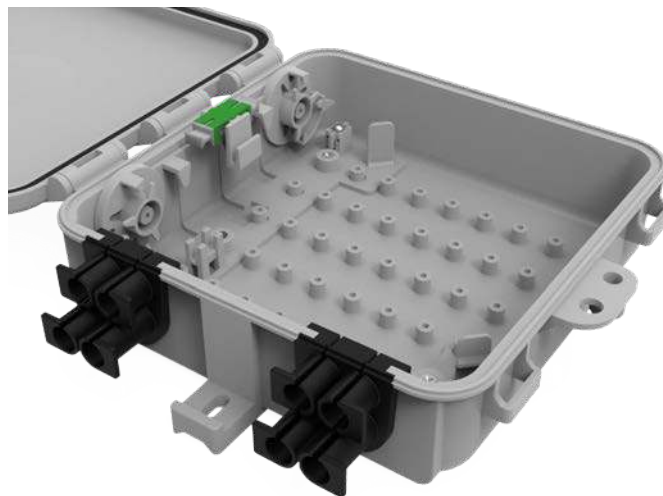

Spool NID with Fiber Spool installed.
Fiber Spool sold separately.

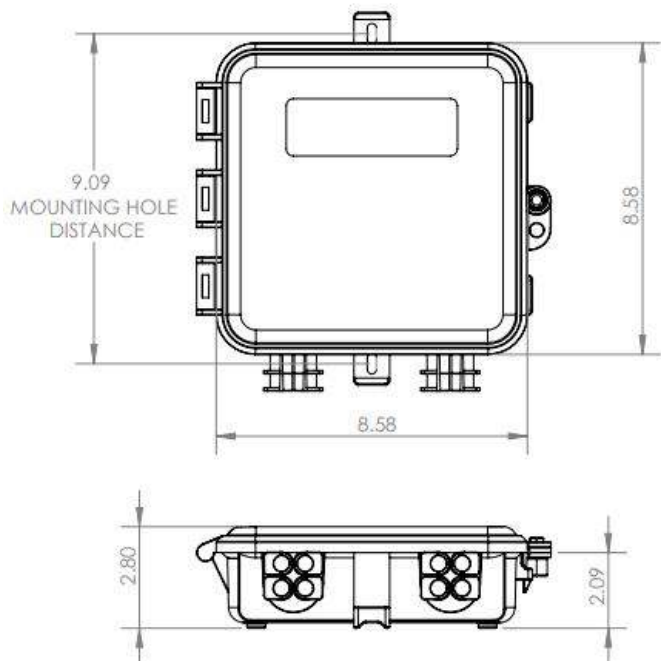

ORDERING INFORMATION

Enginuity Part #	Description
NDSL-XAAA-BABA	Spool NID, Empty, SCAPC Adapter, 4-Port Grommet Left and Right, BABA
NDSL-XABA-BABA	Spool NID, No Spool, SCAPC Adapter, Conduit Grommet Left, 4-Port Grommet Right, BABA
NDSL-XABB-BABA	Spool NID, No Spool, SCAPC Adapter, Conduit Grommet Left and Right, BABA

Contact your Enginuity representative for other configurations.